



Features & Benefits

- Clip-on lids make installation quick and trouble free
- Manufactured to BS EN 50085
- Manufactured from high impact grade PVCu
- Full range of clip-on fittings available
- Available in self-fixing version

Containment Capacity Guide

Approximate theoretical maximum number of cables, allowing for 30% free space:

	38x25	25x16
Category 6A F/UTP	4	1
Category 6 UTP	12	5
Category 6 FTP	15	4
Category 5e UTP	12	4
Category 5e FTP	15	6

Ordering Information


Product Description	Part Number
Maxi Trunking	
Maxi Trunking 38x25 mm, 1x3 Metre (White)	012-003-001-001
Self Adhesive Trunking 38x25 mm, 1x3 Metre	012-008-004-01
Internal Bend 38x 25 mm	012-003-002-001
External Bend 38x25 mm	012-003-003-001
Flat Bend 38x25 mm	012-003-004-001
End Cap 38x25 mm	012-003-005-001
Mini Trunking	
Mini Trunking 25x16 mm, 1x3 Metre (White)	012-002-001-001
Self Adhesive Trunking 25x16 mm, 1x3 Metre	012-008-002-01
Internal Bend 25x16 mm	012-002-002-001
External Bend 25x16 mm	012-002-003-001
Flat Bend 25x16 mm	012-002-004-001
End Cap 25x16 mm	012-002-005-001
Entry Gland 25x16 mm	012-002-006-001
Equal Tee	012-002-007-001
Surface Box Adaptor	012-002-008-001

The Mini and Maxi Trunking ranges from Connectix are designed and manufactured to give a clean, uncluttered profile with a superb finish.

The body of the Mini Trunking is strong, tough and will take irregularities in wall and ceiling surfaces with ease. The clip-on lid gives the utmost security but is capable of being easily removed by the installer for maintenance or alteration to the cabling system.

Both trunking types are designed and manufactured by Marshall Tufflex in high impact grade PVCu in order to withstand the most rigorous conditions and are produced in a standardised shade of white.

The trunking is also available in self-fixing form with double sided tape for ease of installation. These will stick to almost any dust-free surface, including; wood, plaster, plastic, metal, brick, paintwork, paper, glass.

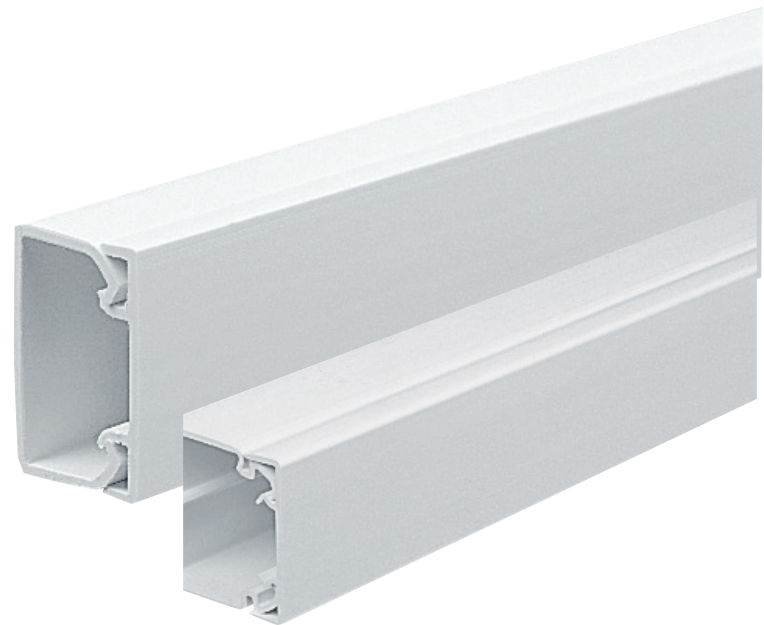



Features & Benefits

- Ideal for new buildings and refurbishments
- Three discrete compartments to allow separation of services
- Attractive surface mount design
- Large range of fittings available

Ordering Information


Product Description	Part Number
Dado Base Unit - 3 Metre	012-001-005-001
Dado Main Compartment Lid	012-001-006-001
Dado Angled Cover	012-001-007-001
Dado Coupler	012-001-008-001
Dado End Cap	012-001-009-001
Dado Internal Bend	012-001-010-001
Dado External Bend	012-001-011-001
Dado Flat Angle	012-001-012-001
Dado PVC Single Gang Back Box - 30 mm	012-007-003-011
Dado PVC Dual Gang Back Box - 30 mm	012-007-003-021

Connectix Trunking has been specifically designed for the modern office environment, and is a modular system ideal for the transportation of data, communication and power.

Ideally suited for new buildings and refurbishments, Dado trunking is also suitable for a wide range of applications in offices, laboratories, hospitals and workshops.

The base unit features elongated holes in the back for ease of fixing. The main compartment lid clips on to the base unit and can be cut to length as required for the installation of fittings or the specially designed back boxes. The unit is completed with the angled covers that clip on to the upper and lower edges of the base unit to provide further compartments.

Designed and manufactured by Marshall Tufflex, there is a complete range of corners, flat angles, bends, tees, back boxes and additional components available to facilitate professional installation.

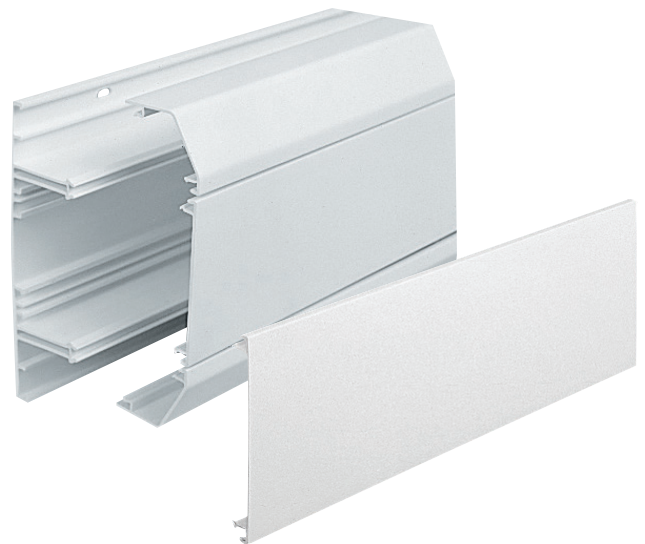



Features & Benefits

- Light gauge 25 mm overall diameter
- High impact PVCu material
- Meets all the relevant standards
- Quick and easy to install
- Large range of fittings available

Ordering Information

Product Description	Part Number
25 mm Conduit 3 Metre	012-002-010-25I
Circular Lid 50 mm Flush	012-002-017-00I
25 mm Coupler	011-004-025-04
25 mm Inspection Bend	012-002-012-25I
25 mm Plain Bend	012-002-011-25I
25 mm Female Adaptor	012-002-015-25I
25 mm Male Adaptor	012-002-014-25I
25 mm Spacer Bar Saddle	012-002-009-00I
25 mm Through Box	012-002-016-25I

Containment Capacity Guide

Approximate theoretical maximum number of cables, allowing for 30% free space:

Category 6A	2
Category 6 UTP	3
Category 6 FTP	3
Category 5e UTP	7
Category 5e FTP	4

The Connectix conduit range is manufactured from high impact PVCu material which has been specially formulated to meet the requirements of BS EN 50086, BS4607, BS6099 and BS7671 (wiring regulations).

The conduit is designed and manufactured by Marshall Tufflex and is capable of withstanding the most hazardous conditions on-site. It exceeds the most stringent requirements of the British Standards.

The conduit range includes a wide variety of plain bored circular boxes in various through, angle and tee configurations. The boxes are suitable for suspending a load of up to 3 kg centrally at 60°C maximum.

