CONECTOR "F" COMPRESIÓN (CXT-5/CXT-50)
"F" COMPRESSION CONNECTOR (CXT-5/CXT-50)

INTRODUCCIÓN

Fabricados de latón niquelado (lo que les otorga una alta calidad de acabado y muy bajas pérdidas) y añadiendo una junta tórica de plástico (paliacetal). Se destinan para su uso en redes coaxiales de media o pequeña dimensión. Se caracterizan por poseer una conexiónfirme y robusta gracias a su cierre por compresión, lo que repercute en su facilidad para el roscado o desenroscado repetitivo sobre los diferentes dispositivos.
Para su montaje se precisa de la herramienta de compresión Ref.2163/216301, a las cuales se puede sumar la herramienta de inserción 216310.

INTRODUCTION

Made out of nickel-plated brass (which gives them a high quality finish and very low losses) and adding a plastic O-ring (paliacetal). They are intended for being used in medium or small dimension coaxial networks. Characterized by having a firm and robust connection thanks to their compression closure, which has an impact on their ease for repeated threading or unscrewing on the different devices. For its assembly, the compression tool Ref. 2163/216301 is required, at which the insertion tool 216310 can be added.

MONTAJE / ASSEMBLY

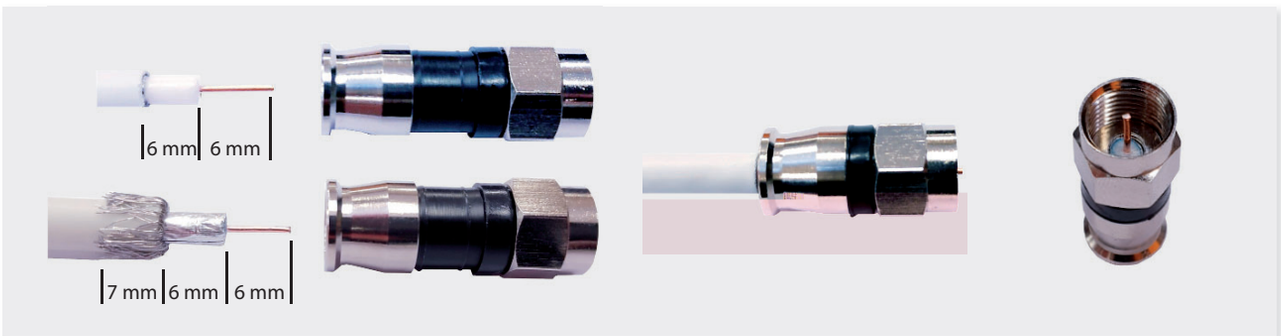

CARACTERÍSTICAS / CHARACTERISTICS

Especificaciones técnicas	*Technical specifications*			4105 FPS59
Rango de frecuencias	*Frequency range*		MHz	0,3 - 3000
Impedancia nominal	*Nominal impedance*		Ω	75
Pérdidas de inserción	*Insertion loss*	0.3 - 1000	dB	-0,08
		1000 - 2150		-0,12
		2150 - 3000		-0,16
Compatibilidad coaxial	*Coaxial compatibility*			CXT-5 / CXT-50
Llave para montaje	*Key for assembly*		mm	11
Dimensiones conector	*Connector dimensions*		mm (L / Ø)	31,3 / 12,5
Peso	*Weight*		g	6 ± 5%

SUMINISTRO / SUPPLY

Forma de suministro	En caja plástica de 50 unidades
Supply form	50 units plastic box

Fabricante / Manufacturer : Televes S.A.U. Rúa B. de Conxo, 17 - 15706 Santiago de Compostela, A Coruña Spain www.televes.com

4105_000_ES-EN

2020 © Copyright, Televés S.A.U.