



Product Overview

The Connectix 4000 series offers Fibre outlets in a high density package. The 4000 series is quick and easy to install, just attach the base plate, plug in your SC/APC connectors and install the cover. This model offers 2 x SC/APC Simplex connections, 3 x fibre management spools with a 20mm diameter. A single splice holder with an integrated holder for a fibre splitter.

The 4000 Series outlets have been designed for direct wall mounting with top entry mini trunking. In addition, they fit on a standard backbox to provide maximum mounting flexibility. The position of the adaptors on the vertical outlet allows for a compact installation without protruding leads.

Features and Benefits

- High Density, single gang unit
- Available in a 2 or 4 port version
- No protruding leads
- Designed for direct wall mounting
- Custom logo service available

Specifications

Width	87 mm
Depth	27 mm
Height	87 mm
Material	ABS thermoplastic resin, with grade UL94 VO at 1.5 mm flame retardancy
Finish	High Gloss
IDC Colour	Code IDC colour code to T568B
IDC Blocks	4-way industry standard IDC blocks
PBC	1.6 mm double sided PTH boards
Conforms to	ANSI/TIA-568-C

Ordering Information

As each Outlet is completely custom, please contact us with all your required specifications: sales@connectix.co.uk



Splice holder pictured above



Fibre splitter pictured above, resting on top of the splice holder.

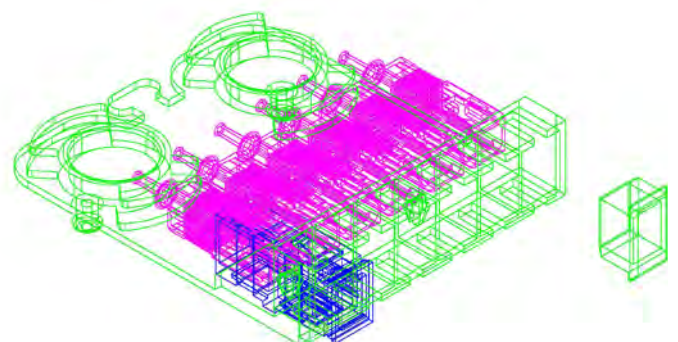


Diagram of Outlet