

# Connectix Cabling Systems™

## Anchoring Clamps


Connectix anchoring clamps are used for the dead-ending of aerial figure 8 cables with FRP or steel messenger on access networks where spans do not exceed 90m.

These anchor clamps consist of a thermoplastic conical body, a pair of wedges and long stainless steel flexible bail. The bail is equipped with an insulated thimble.

All plastic parts are UV resistant. All parts are captive.

### Features and Benefits

- Simple, fast and tool-less installation.
- Can be installed on many types of pole hardware (holes with min Ø 15mm)
- Effective cable clamping due to its specific wedging system.

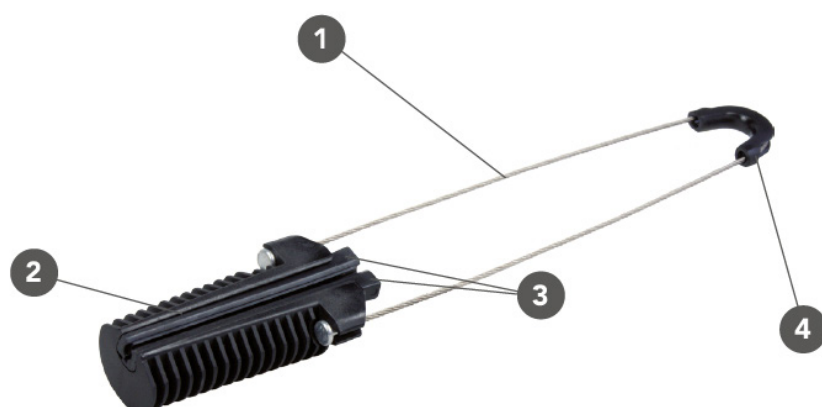

### Legend

1. Bail
2. Body
3. Wedges
4. Thimble



### Product Specifications

Ø Messenger	3-6mm
Bail Length	260mm
Maximum Tension Load	3000N
Weight	0.12kg

### Ordering Information

Description	Part Number
Connectix Anchoring Clamps	004-002-00-10

### Installation

- On end poles.
- When the line is at an angle greater than 25° (instead of a suspension device), in order to preserve the integrity of the cable over time.
- If road crossing (obligatory cable stop on each pole both sides of the road).
- In case of unbalanced adjacent spans
- If rugged terrain (line mountainside down for example).
- In alignment every 5 poles (if using suspension clamp on intermediate poles) or on every poles (double anchoring).