

O2O

Introducing the new O2O (Optical to Optical) convertor from Global Invacom. Fully compatible with all the current FibreIRS headend equipment and designed for future compatibility. Replaces the functionality of the O2E and ODU32 in one compact unit.


Specifications:

O2O

Technical Specifications:

Product Part number	
O2O	
FM,DAB,DTT & Satellite (Optical)	
Optical wavelength (Input)	
Optical input power	
Optical output power	
Return Loss	
DC specification	
Input voltage	
Current consumption	
Dimensions (W x H x D)	
Unit only	
Weight	
Connectors	
Input	
Output	
Power supply	
Environmental Specification	
Operating temperature	
Storage temperature	

Typical topology with the Otx

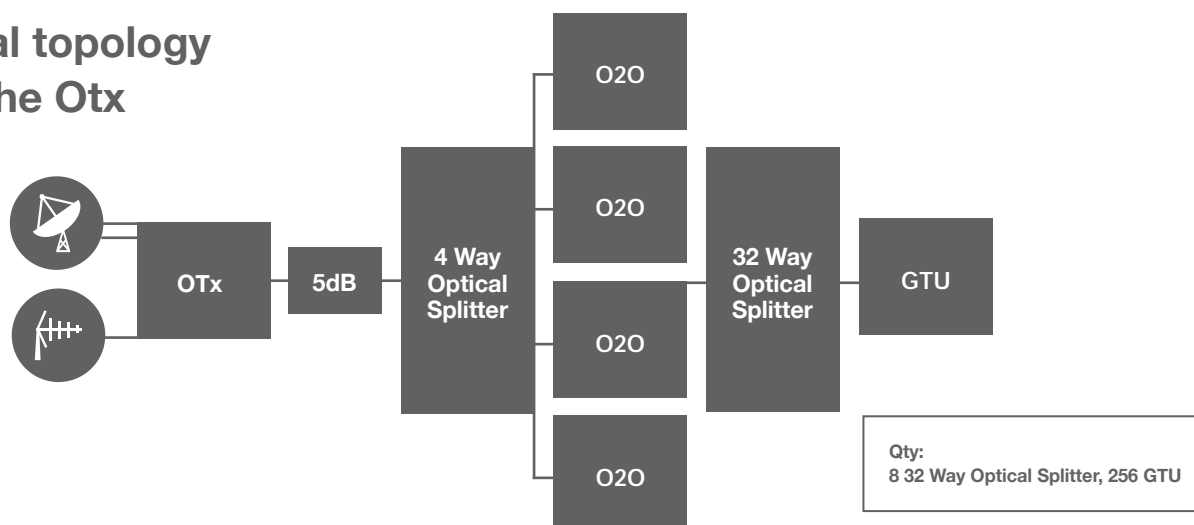

Global Invacom will only support systems that are installed using FibreIRS™ approved fibre cabling & system components