

# Fibre Optic Cabling

## Connectix IP68 External Drop Terminal Enclosure (DTC) 4 and 6


This IP68 External Drop Termination Closure (DTC) 4 and 6 offer a durable, compact solution with multiple internal fibre organisers to support your current and future needs. Network evolution is unpredictable so why not choose a closure system developed to adapt. The DTC4 can be used as a transition unit for interior duct applications. Both the DTC4 and DTC6 can equip an adapter bulkhead tray that hinges to allow access to the underlying fibre slack storage area.

### Features and Benefits

- Dimensions: 10.8" x 7.8" x 3.2" (274 x 198 x 82 mm)
- Max Splice Capacity: 24 Single Fusion
- Max Adapter Quantity: 4 Dual SC or 4 Quad LC
- Grommet Quantity: 4 or 6 (Multi-Hole Grommets Available)
- Grommet Cable Diameter Range: Large Grommets= 0.118" - 0.60" (3- 15 mm)  
Small Grommets= 0.093" -0.420" (2.4 -10.7 mm) and Flat Drop
- Applications: Aerial, Below Grade, Direct Buried, Pole/Wall Mount, Pedestal, or Interior Applications
- Designed and tested in accordance to Telcordia® GR-771-CORE Buried, Underground, IP-68 Rated Requirements
- Constructed out of rugged UV-stabilized, flame-retardant material (UL94-5VA Rated)
- Hinged cover with integrated over-mold creates a secure seal and provides quick re-entry and re-use



DTC-4

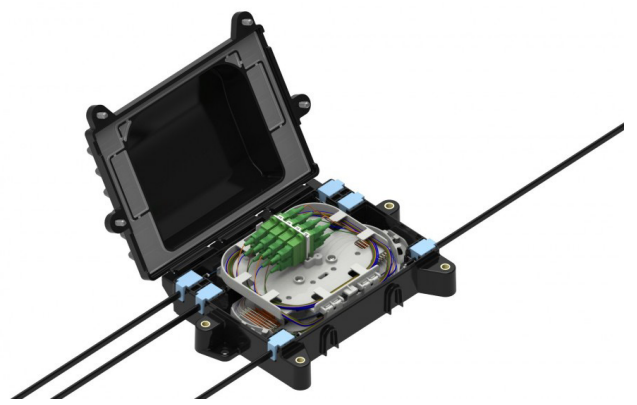

DTC-6

### Ordering Information

| Product Description                                  | Part Number    |
|------------------------------------------------------|----------------|
| Connectix IP68 External Drop Terminal Enclosure DTC4 | 009-007-011-50 |
| Connectix IP68 External Drop Terminal Enclosure DTC6 | 009-007-011-60 |